




ECG-8632 GWH

Cod. **932271942**

EAN **8422248198509**

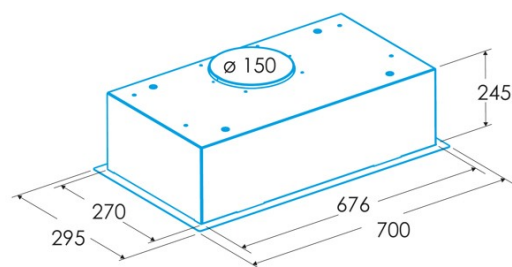

GENERAL INFORMATION

EAN/UPC	8422248198509
Subfamily	Insert

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	63
EEL class (energy efficiency class)	B
FDE (fluid dynamic efficiency)	24,7
FDE class (fluid dynamic efficiency class)	B
LE (light efficiency) (lux/W)	31,2
LE class (light efficiency class)	A
GFE (grease filtering efficiency)	66,7
GFE class (grease filtering efficiency class)	D
Airflow in normal mode MIN (m3/h)	246
Airflow in normal mode MAX (m3/h)	587
Airflow in boost mode MIN (m3/h)	0
Acoustic power in normal mode MIN (dB)	47,6
Acoustic power in normal mode MAX (dB)	68,1
Acoustic power boost mode (dB)	0
Po (energy consumption in off mode) (W)	0
Ps (energy consumption in standby mode) (W)	0,49

Integration directive EU 66/2014

f (time increase factor)	1,11
EEL (Energy Efficiency Index)	64,3
QBEP (maximum efficiency at air flow point) (m3/h)	317,5
PBEP (maximum efficiency at pressure point) (Pa)	408
WBEP (power consumption at maximum efficiency) (W)	145,7
WL (nominal power lighting system) (W)	6
EMIDDLE (Average illuminance on the cooking surface) (lux)	187

External Dimensions

Width (mm)	520
Depth (mm)	295
Maximum total height (mm)	240
Minimum total height (mm)	240
Diamètre de sortie (mm)	150

Characteristics

Motor quantity	1
Motor model	EBM-190
Filter technology	Aluminium mesh
Control technology	Electronic Touch Control
Booster	-
Power levels	3
Timer	-
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	-
Connectivity	No
Remote control	-
Display	-

Lighting

Light model	SSLED
Ray technology	LED

Installation

Minimum distance to electric plate (mm)	65
Minimum distance to gas plate (mm)	65
Recirculation option	-
Charcoal filter	-
Back draught shutter	Included
Inner shield	-

Electric connection

Nominal voltage (V)	220-240
---------------------	---------

Nominal frequency (Hz)	50
Nominal input power (W)	189,5
Electric shock protection	Class I
Power cord length (m)	1,2
Plug type	No plug

Accessories

Activated charcoal filter	02859405
---------------------------	----------